
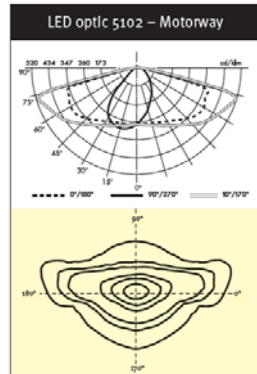


PIANO

Specification Sheet/Order Form:


Nº of LEDs _ Power MINI: PIAM- 24L-41W MIDI: PIAD-56L-91W MAXI: PAIX-96L-151W	Color NW – Neutral White	Photometry 5068 – Type III 5102 – Type II	Mounting H48-60 – Horizontal 48 to 60mm Dia	Voltage 120/277V-50/60Hz	Paint AKZO 200- Black Sanded

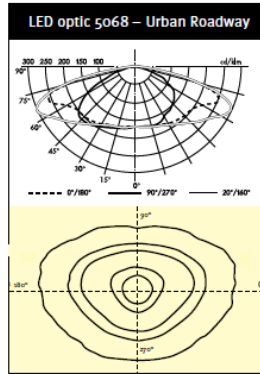

DIMENSIONS

All measurements in inches/millimeters

	Mini	Midi	Maxi
L	3.0"/585mm	26.7"/677mm	40.0"/989mm
W	10.9"/276mm	10.9"/276mm	11.6"/295mm
H	3.4"/87mm	3.4"/87mm	3.6"/92mm

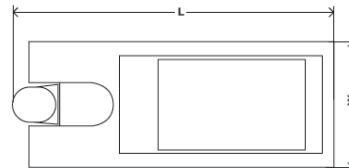

OPTIONS

Controls NoOC – No Controls CST – Custom (Consult Factory)

Luminaire Specifications:

Housing: Die-cast aluminum body with powder-coat finish (AKZO200). Standard, horizontal pole mounting with 34-60mm pole diameter; vertical mounting available on demand. Flat tempered glass protector with IP66 tightness (according to IEC-EN60598) and impact resistance rating of IKo8 (according to IEC-EN62262). Meets ANSI C136.31-2010 vibration standards (rated 1.5G). Made from durable and recyclable materials.

Weight: Mini - 17lbs/8kg; Midi - 25lbs/11.5kg; Maxi - 35lbs/16kg

Electrical: Class I Driver, standard. 120-277V, 50/60Hz operating current of 700mA (Mini & Midi) and 530mA (Maxi). Minimum power factor 0.90 rated for 100,000 hours. Surge protector 10kV standard on all product ranges.

Light Emitting Diodes: Lead and Mercury free. Average correlated color temperature (CCT) 4100K, LM-80 and TM-21 calculated/tested. Fixtures are tested and certified by third party lab for complete IES photometry reporting and publications in accordance with LM-79.

Certifications: ETL listed in USA and Canada, in accordance with ANSI/UL 1598/CAN/CSA-22.2 No.250.12-12 and UL 8750, 1st Ed. REV10/17/2012, CAN/CSA-22.2 No.250.13-12.

Warranty: TEN (10) year limited warranty; see www.schreder.com for terms and conditions.