


STYLAGE bracket

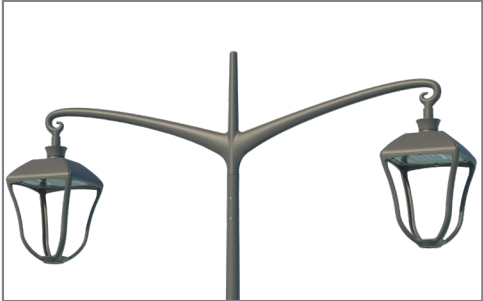


Retro elegance for modern urban spaces

STYLAGE is an aluminum bracket featuring a modernized retro design with elegant lines and a distinctive volute detail. Its versatile style fits perfectly into a wide range of projects: city centers, residential areas, commercial spaces, parks, promenades, and contemporary developments. Available in multiple finishes and colors, it brings character and harmony to any urban environment, combining heritage aesthetics with modern appeal.

Technical information

GENERAL			
Housing	Aluminum foundry	Pull wire included	Yes
Finish	Polyester powder-coating	Sea-side coating	Available upon request
Colour	AKZO 900 grey sanded Any RAL or AKZO colour upon request		

PRODUCT FAMILY DRAWING

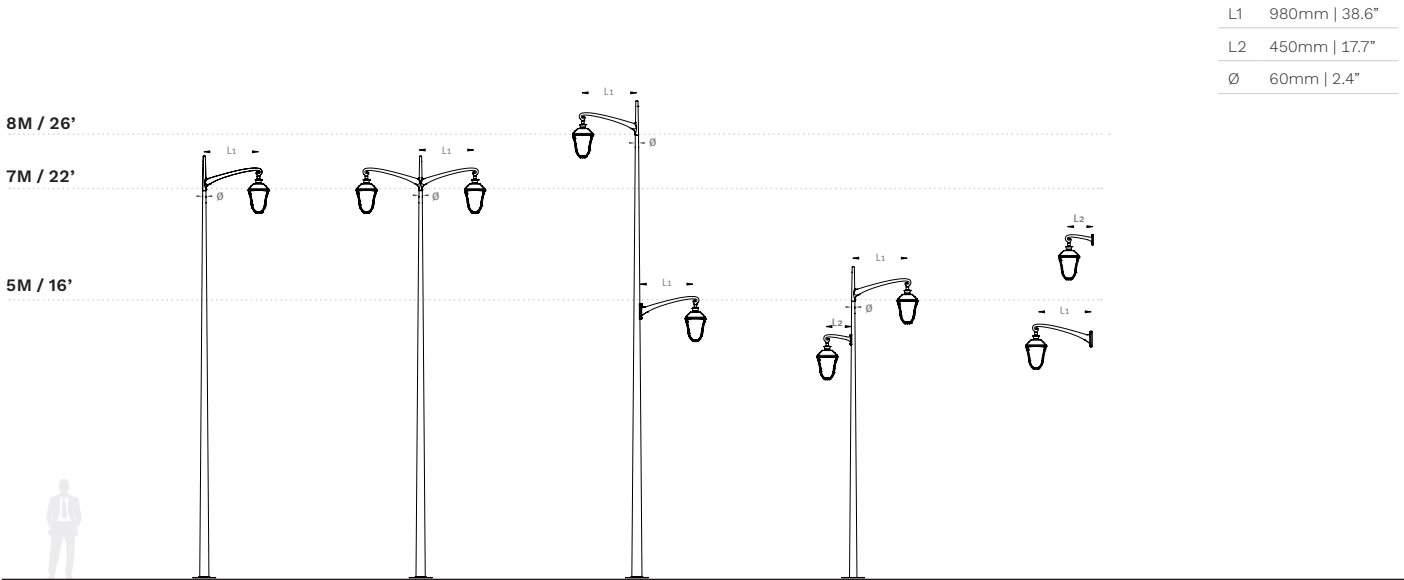

PRODUCT VARIANTS & INTERFACES

Type	Length (mm)	To pole				To luminaire
		Diameter	Tube penetrating (male)	Lateral on pole min. diameter	Wall	Suspended 1" Gas female (need luminaire in 1" Gas male)
Top simple Ø60	980	Ø60	X	-		X
Top double Ø60	980	Ø60	X	-		X
Lateral & Wall	980	-	-	Min > Ø70	X	X
Lateral & Wall	450	-	-	Min > Ø60	X	X

Note: this information is to be combined with the specific technical drawing.

LUMINAIRE COMPATIBILITY

Type	Length (mm)	Maximum luminaire characteristic		
		CXs (m²)	Weight (Kg)	Center of gravity* (mm)
Top simple Ø60	980	0.21	18.5	300 (Z)
Top double Ø60	980	0.21	18.5	300 (Z)
Lateral & Wall	980	0.21	18.5	300 (Z)
Lateral & Wall	450	0.21	18.5	300 (Z)

* Distance between the luminaire fixation point and the center of gravity



INFORMATION FOR EN40 CALCULATION

Name	Type	Centre of pressure on X (mm)	Centre of pressure on Z (mm)	Endpoint bracket on X (mounting point - mm)	Endpoint bracket on Z (mounting point - mm)	CxS (m²)	Weight (kg)
STYLAGE TOP SIMPLE Ø60 L980	Single	340	280	980	210	0.14	8
STYLAGE TOP DOUBLE Ø60 L980	Double	0	280	980	210	0.25	13.4
STYLAGE D60 LATERAL L980	Lateral & Wall	430	115	1000	75	0.13	6
STYLAGE D60 LATERAL L450	Lateral & Wall	260	20	445	-105	0.05	1.7

